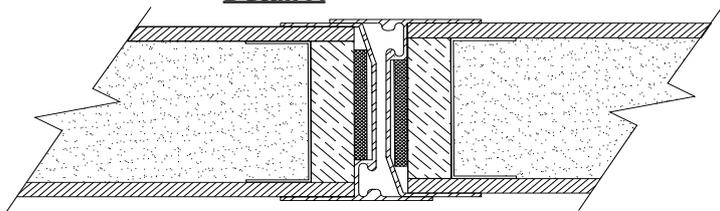
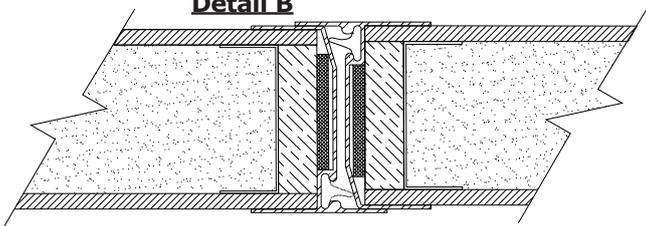


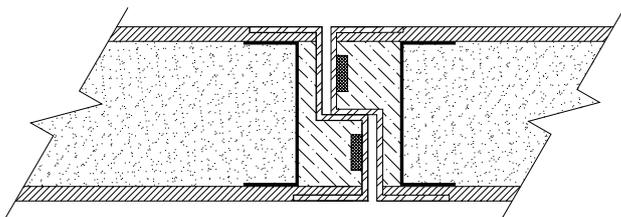
DESCRIPTION

Fire rated meeting stiles suitable for Pyropanel pair fire doors for up to 4 hours of fire rating.

Detail A

Detail B

**Pyropanel Aluminium J-Section meeting stile
(Up to 4 hours of fire rating)**

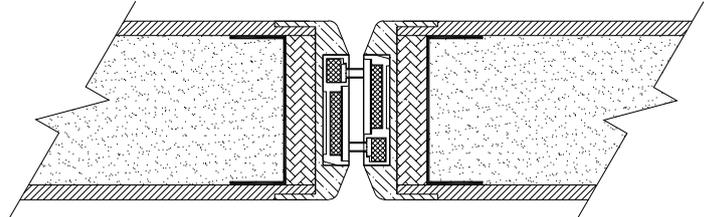
Standard meeting stile of anodised aluminium interlocking J-Section fitted to each leaf. Note: No fin seal required for fire rated applications as per Detail A.

For smoke sealing applications for 1hr, Pyropanel fin smoke seals are used in each meeting stile grooves as per Detail B.

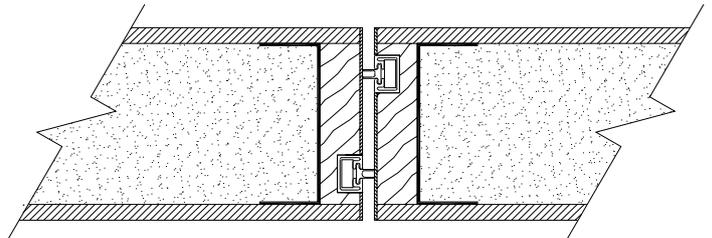

**Pyropanel Aluminium Rebated meeting stile
(Up to 4 hours of fire rating)**

Meeting stile of anodised aluminium suitable for doors with up to 4 hours of fire rating.

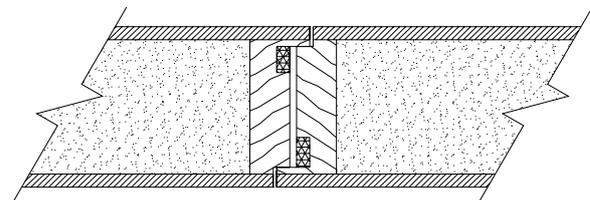
Note: Limited availability, please check with your local Pyropanel distributor for availability in your area for the special meeting stile.


**Pyropanel Aluminium Bull-nose meeting stile
(Up to 2 hours of fire rating)**

Meeting stile of anodised aluminium suitable for single-acting and double-acting fire doors. Meeting stile incorporates an intumescent seal with fin smoke seals.


**Pyropanel Square edge meeting stile
(Up to 1 hour of fire rating)**

Meeting stile with Raven RP76 seals and veneered edge strip to enable the meeting stiles to look like solid timber. Maximum approved pair doors limited to: 2200 x 920/920mm.


**Pyropanel Timber Double-Rebated meeting stile
(Up to 1 hour of fire rating)**

Timber meeting stile with double-rebated detail and integrated hot smoke seals.

Maximum approved pair doors limited to: 2420 x 1020/1020mm or 2200 x 1120/1120mm .

Pyropanel Developments Pty Ltd

235 Huntingdale Rd, Oakleigh, Vic 3166

Ph: **(03) 9837 8500** Fax: (03) 9837 8550

Email: sales@pyropanel.com.au

Web: www.pyropanel.com.au

Distributed by: